

# RUGGED CAMS

By Rugged CCTV






## Low Pro Dome Camera

### Specification

Image sensor	1/3" Sony 960H Ex-view HAD CCD II
Effective Pixels	NTSC : 976(H) x 494(V), PAL : 976(H) x 582(V)
H. Resolution	650TV Lines(Color)/ 700TV Lines(B/W)
Synchronizing system	Internal
Scanning system	NTSC : 525 Lines PAL : 625 Lines 2:1 Interlaced
Video output	1.0Vp-p Composite 75 Ohms
S/N ratio	More than 52dB (AGC Off)
Min. Illumination	0.1Lux(Color)/ 0.01Lux(B/W)
Shutter Speed	NTSC:1/60~1/100,000 sec. PAL:1/50~1/100,000 sec.
Gamma Correction	Standard $\gamma = 0.45$
White Balance	1,800 K ~ 10,500 K Auto (ATW/ Push/ Push lock/ User 1/2, Anti CR, Manual)
Gain Control	Standard : -6dB ~ 44.8dB Auto
Smear Effect	0.005%
Power source	12VDC, 12VDC/24VAC
Operating current	150mA/12VDC, 85mA/24VAC
Lens	3.3-12mm Varifocal DC Auto Iris lens
MTBF	80,000 hours
Iris Control	Auto
Operating temp./Humidity	-10°C ~ 50°C (Humidity : 0% RH ~ 90% RH)
Measurement (mm)	180(D)x81(L)
Weight (Approx. g)	950

### FUNCTION

Shutter/ AGC	Auto/ Manual
White Balance	ATW / Push/ Push Lock / User 1, 2/ Anti CR/ Manual
Backlight	BLC/ HLC/ Off
Picture Adjust	Mirror(On/Off), Brightness, Contrast, Sharpness, HUE, Gain
ATR	On/ Off
Privacy Mosaic	On/Off (4 Zone setting available)
Day/Night	Auto/ Color/ BW
NR	NR Mode/ Y Level/ C Level
Camera ID	On/ Off
Language	English/ Germany/ French/ Russian/ Spanish/ Portuguese, Japanese

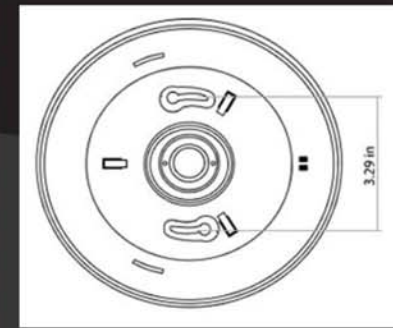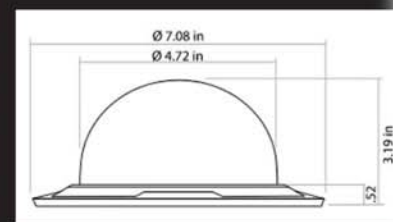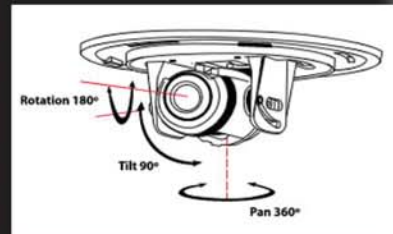

© Rugged Cams™ are manufactured by Rugged CCTV. All rights reserved.

866-301-2288

www.ruggedcams.com