

RUFF RIDE PTZ




SPECIFICATIONS

Camera	
Image Sensor	1/4" SONY EX-View HAD CCD
Effective Pixel	PAL: 752(H)x582(V); NTSC:768(H)x494(V)
Resolution	550 TVL
Optical Zoom	36X
Digital Zoom	12X
Min Illumination	0.01 Lux (Lights Off) 0 Lux (Lights On)
White Balance	Auto
Focus	Auto/Manual
Exposure	Auto/Manual
S/N Ratio	Not less than 50DB
BLC	On/Off
WDR(150X)	Yes
Image Stabilization	On/Off
Digital Noise Reduction	1~5 Steps
Day/Night	Yes
Lens	f=3.4mm~122.4mm, F1.6 to F4.5
View Angle	57.8° (wide) to 1.7° (tele)
Pan Tilt Zoom	
Pan Range	360° continuous
Pan Speed	0.04° -90°/s, adjustable
Tilt Range	-15°~90° with auto flip
Tilt Speed	0.3° ~60°/s adjustable
Preset Speed	Pan: 120°/s; Tilt: 90°/s
Preset	256
Preset Precision	±0.05°
Infrared Light Model	
IR Wave Length	850nm
IR Lamp Power (with driver)	30w
IR Light Power	10w
IR Range	390' Feet
IR Switch	Auto/Manual
White Light Model	
Color Temperature	6500K
Lamp Power (with driver)	30w
Brightness	2100 LM
Range	390' Feet
Switch	Manual
General	
Comm. Interface	RS-485
Protocol	PELCO-P / PELCO-D
Baud Rate	2400bps, 4800bps, 9600bps, 19200bps (self-adaptive)
Address	0-255
Voltage	DC 10.8-28V
Power Consumption	6000mA (max)
Working Temperature	-50°F ~ +150°F
IP Index	IP67, TVS, Anti-Surge
Dimensions	11.81" (H) x Ø7.50"
Weight	12.5 lbs



DIMENSIONS

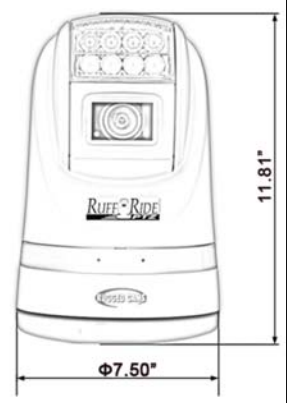

© Rugged Cams® are manufactured by Rugged CCTV. All rights reserved.