

RUGGED CAMS

By Rugged CCTV



Tru-Scene




Tru Color Hi-Res Day/Night Non Infrared Camera

Specifications

Image sensor	1/3" Sony 960H Ex-view HAD CCD
Effective Pixels	NTSC : 976(H) x 494(V), PAL : 976(H) x 582(V)
IP Rating	IP67
H. Resolution	650TV Lines
Synchronizing system	Internal
Scanning system	NTSC : 525 Lines PAL : 625 Lines 2:1 Interlaced
Video output	1.0Vp-p Composite 75 Ohms
S/N ratio	More than 52dB (AGC Off)
Min. Illumination	0Lux
Shutter Speed	NTSC:1/60~1/100,000 sec. PAL:1/50~1/100,000 sec.
Gamma Correction	Standard $\gamma = 0.45$
White Balance	1,800 °K ~ 10,500 °K Auto
Gain Control	I Standard : -6dB ~ 44.8dB Auto
Smear Effect	0.005%
Power source	12VDC
Operating current	120mA
Lens	4 - 9mm Manual Varifocal
Iris Control	Auto
Operating temp./Humidity	-14°F ~ 122°F (Humidity : 0% RH ~ 90% RH)
Measurement	3.15"(W) x 3.15"(V) x 5.32(L)
Weight	2.12 lbs

Features:

1/3" Sony 960H Ex-view HAD CCD II
650 TVL Horizontal Resolution
Remarkably True Color reproduction
Lens: 4~9mm Varifocal
Auto Iris Lens control (DC-Iris)
Excellent Back Light Compensation
Excellent Auto White Balance
Extremely reliable power input range
Reverse Polarity Input protection circuit built-in
Zoom and Focus External adjustment

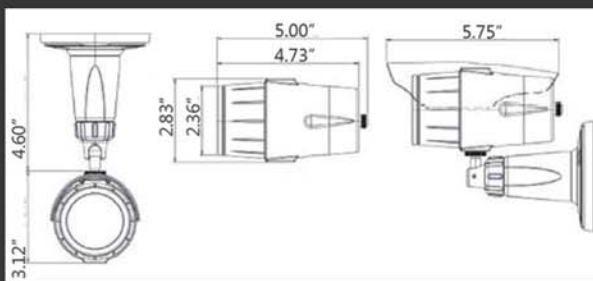

© Rugged Cams™ are manufactured by Rugged CCTV. All rights reserved.

866-301-2288

www.ruggedcams.com